



# **SecureTablePay and PAX A920 w/ EPX Installation Guide 1.0**

# Contents

REQUIREMENTS: ..... 1  
APP CONFIGURATION: ..... 2

SecureTablePay™ is a trademark of POSERA Limited.

© Copyright 2019

POSERA Limited

All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic, mechanical or otherwise, without the prior written permission of POSERA Limited.



## REQUIREMENTS:

- TGI installed and tested (Please refer to TGI installation Guide)
  - TCP/IP network
  - Internet connection
  - .net Framework 3.5 sp1
  - Java JRE 1.8 or higher (32 bit only)
- 
- Whitelisting the following URLs, ports and IP addresses:
    - Port 9999
    - Port 5656
    - ustgilic.tmcsv01.com


# SecureTablePay App Configuration

## 1.1

Connect your PAX A920 to the internet. Please refer to the PAX A920 setup guide you received with your A920 if you have questions on how to do this.

On the PAX A920 home screen find the SecureTablePay App.

**NOTE:** If you do not have the SecureTablePay app, please contact your PAX A920 / EPX vendor.

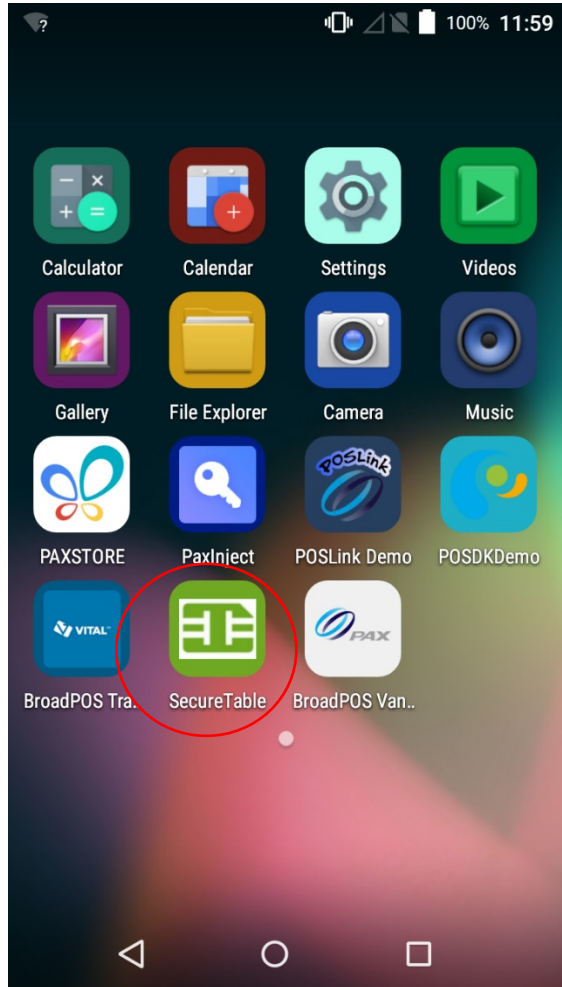

## 1.2

Open the SecureTablePay app; you will now find a screen that refers you to your point of sale provider to configure the app. Touch “accept” to move forward.

This will only be required the first time you run the app or if there is a change to the EULA or privacy policy.

## 1.3

There is a lock screen that requests a password. This is to keep end users from proceeding further without help from their SecureTablePay re-seller or VAR.

The password is: posDDMM


With DD being today’s date and MM being today’s month.

Example: if today is September 1<sup>st</sup>. The password will be pos0109

Press submit.


## 1.4

The app is now unlocked and ready to be configured. Start by touching the settings “gears” located in the top right corner.

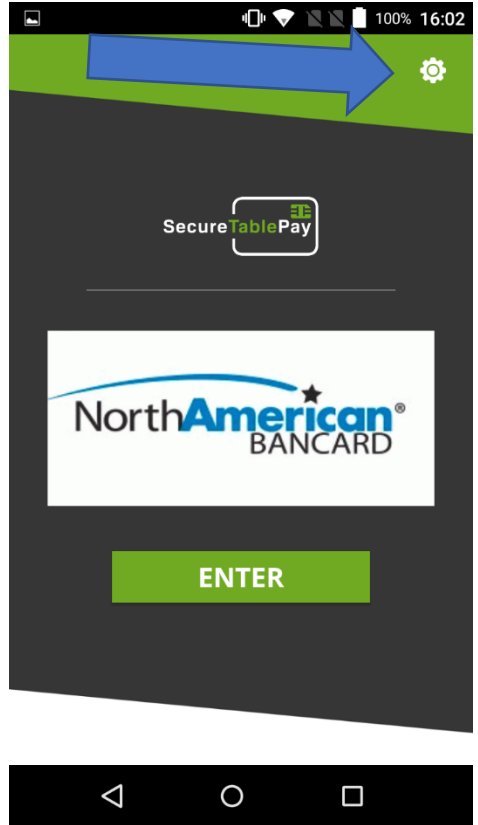


## 1.5

You will once again be prompted for a password. The default password to enter the settings menu is “1234”.

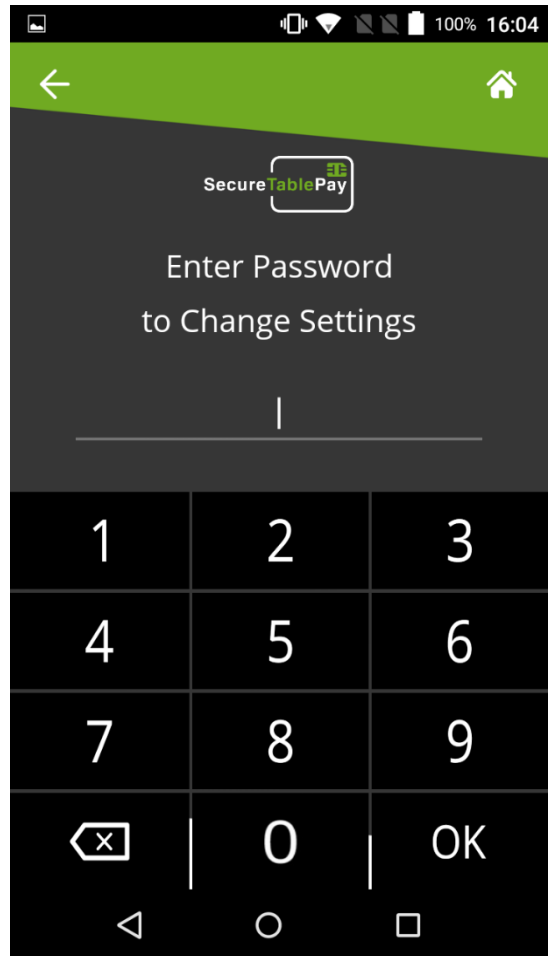

## 1.6

Proceed to the “Advanced Settings” menu.

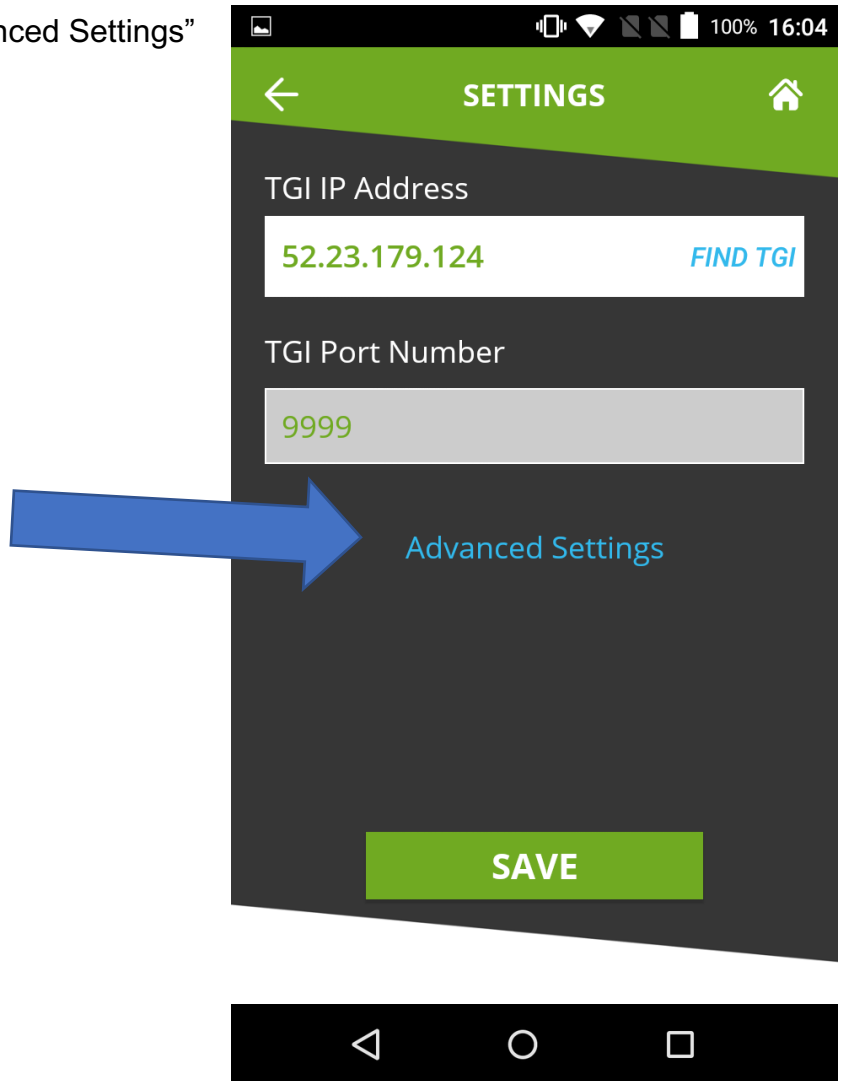




## 1.7

### Configure the Advanced Settings

- Enter TGI port #: Default is 9999
- Choose POS type (2 = Micros, 3= Squirrel, 1 = Everyone Else)
- Configure Tip Presets
- Change settings menu password if needed
- Enable or Disable search by Table
- Enable or Disable search by Check #
- Enable or Disable Pass Terminal to Server or Customer Prompt screens
- Adjust Prompt screen timer
- Enable or Disable a Merchant receipt

Touch “Save” once complete

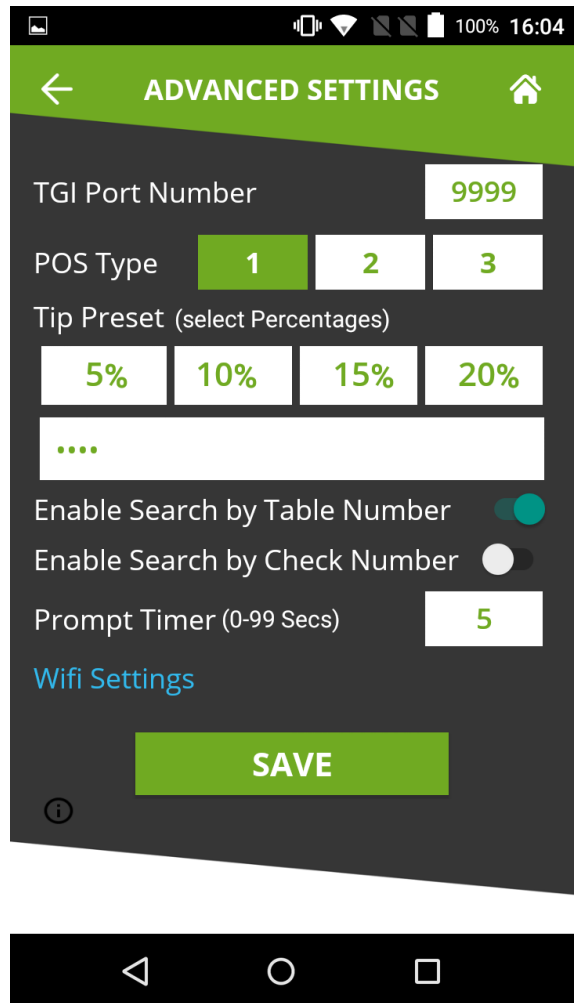

## 1.8

Now enter the IP address of the TGI Server. Touch “find TGI” to test communication. If successful touch “save”. If unsuccessful refer to the TGI configuration manual.

**You are now ready to use the app.**

**Note: New with the STP android app is the ability to use a URL address instead of an IP address. Turn this feature on by simply touching the toggle to the top right of the IP address box.**

